






# Technical Product Specifications

## Primary Installation Scenarios — Installs 4 Ways

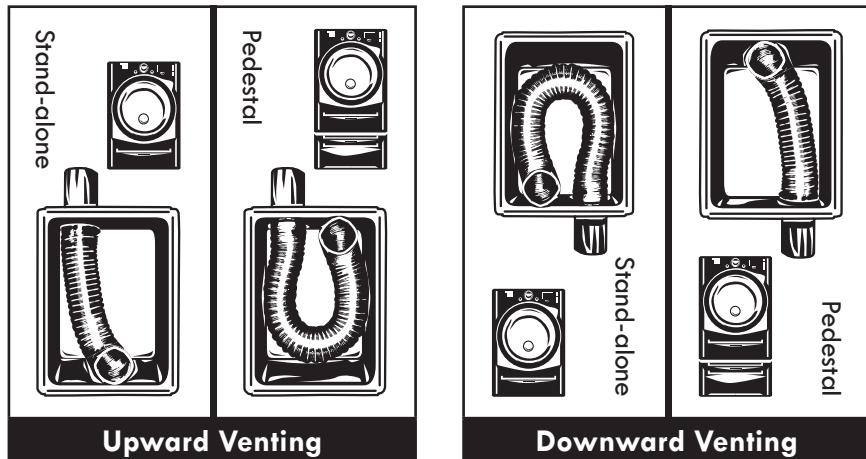

Upward Venting

Downward Venting

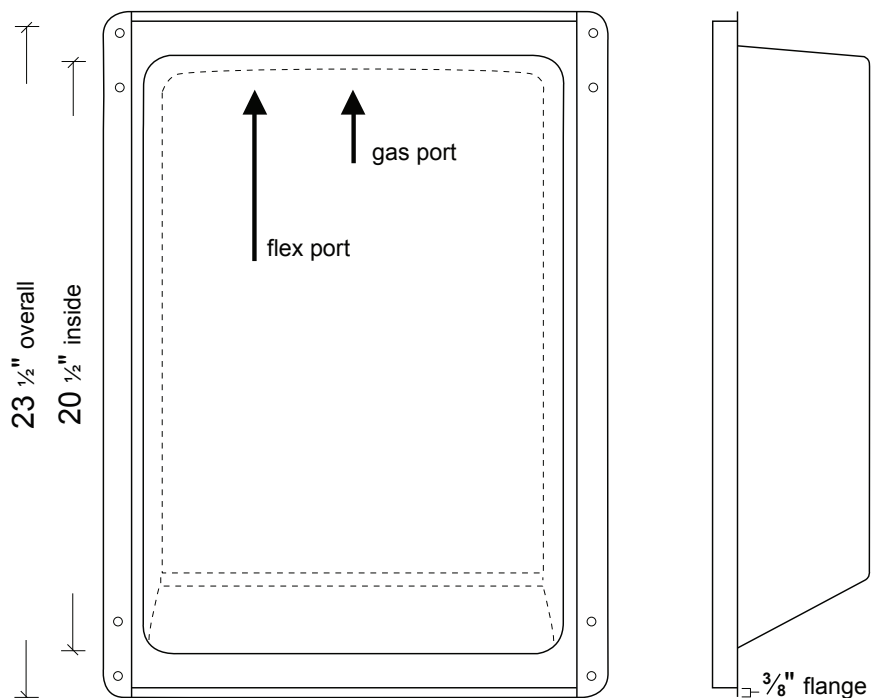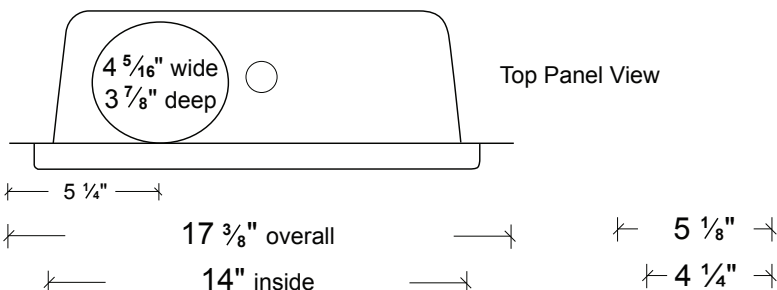

Model	Applications
<b>480</b>	Installs in 2X6 (or 2X4 walls with furring strip) for venting up or down with a larger receiving area to accommodate pedestal and stand-alone dryers.
Performance Data	
<b>For Use:</b>	
<ul style="list-style-type: none"> <li>• Dryer vent hose receptacle</li> <li>• Doubles as gas connection receptacle</li> <li>• Meets code requirements as a clean-out</li> </ul>	
<b>Material:</b>	
<ul style="list-style-type: none"> <li>• Deep drawn 22 gauge Aluminized Steel (.028")</li> </ul>	
US Patents 5,476,183, 6,419,102 and 7,731,045	
General Information	
<b>Benefits:</b>	
<ul style="list-style-type: none"> <li>• Locate the dryer right up against the wall</li> <li>• Flex is protected from getting crushed</li> <li>• Lint build-up is minimized</li> <li>• Efficiency is increased...clothes dry faster</li> <li>• Dryer related service calls are almost eliminated</li> <li>• Laundry room appears larger to prospects</li> <li>• Reduces the fire hazard</li> <li>• Reduces mold potential in the wall</li> </ul>	
<b>Features:</b>	
<ul style="list-style-type: none"> <li>• Accommodates pedestal and stand-alone dryers</li> <li>• No trim-ring piece is needed</li> <li>• Elbow eliminator...gain 5 foot of duct run</li> <li>• Surface is paintable, no masking needed</li> <li>• Helpful Duct Support Tab</li> </ul>	
Manufactured By	
<b>In-O-Vate Technologies, Inc.</b> 810 Saturn Street, Suite 20 Jupiter, FL 33477 Phone: (888) 443-7937 Fax: (561) 745-9723 www.dryerbox.com	